



	A0	I TMA -1060-R68-M	2018/03/06	H	Roger

- L
- L DCR
- H
- H (I)
- R HS H F
- L EMI


- R M
- DC/DC
- T -
- G
- L PC
- SSD

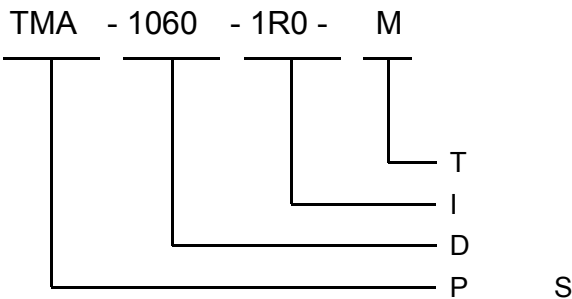


M= 20%
1R0=1.0 H

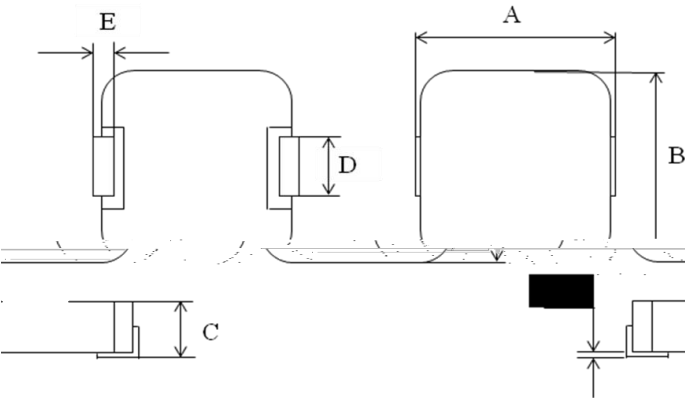


A	
B	
C	
D	
E	
F	

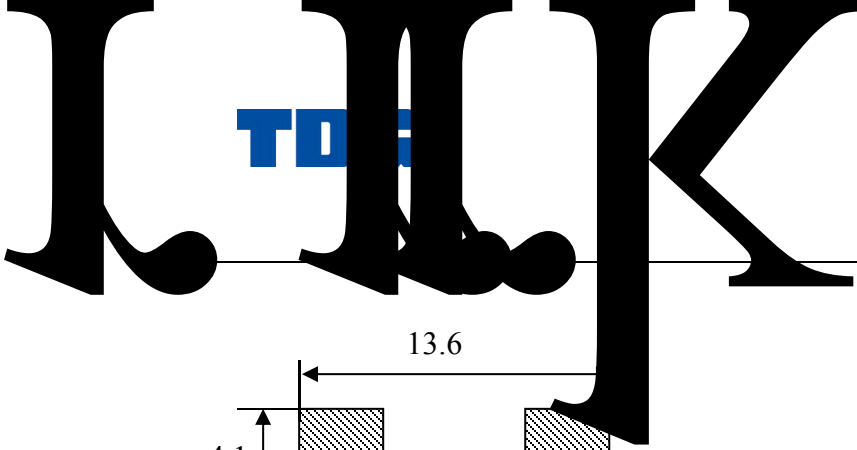

Revision:	A0
Control No.:	

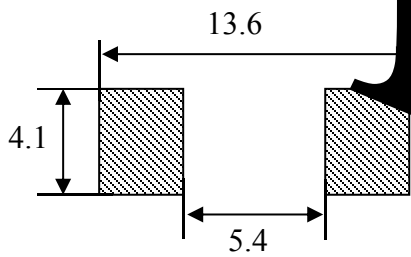

- T 6-
- F : 1R0 1.0 H, R10 0.1 H.

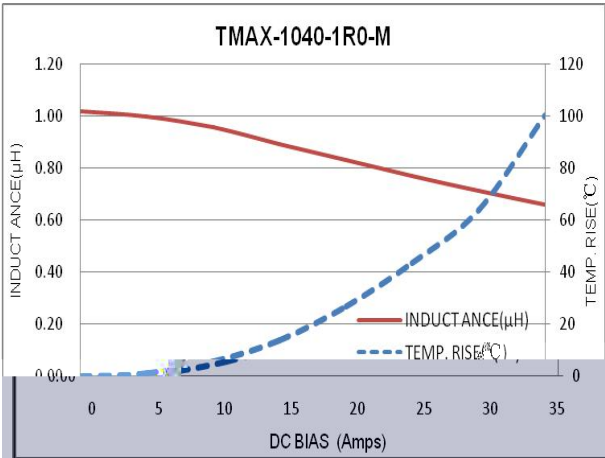


S
1.P : 160 ± 10 C 90
2.R : 245 ± 5 °C 2 ±
0.5

T
95%

1. :
(10H 55H 10H) 60
0


T S	1.R 100 : (-55 ± 2 C,30 ± 3) →(R , 5)→(+125 ± 2 C,30 ± 3)→ (R , 5) 2.R : 48 + 4 / - 0	L/L ₀ ± 5% N .
H T R	1.E T : 85 ± 2 C 2.A C : R 3.D : 1,000 + 4 / - 0	
H R	1.E T : 60 ± 2 C 2.R H : 90 95% 3.D : 1,000 + 4 / - 0	
L T S	1.S : -55 ± 2 C 1,000 + 4 / - 0	
H T S	1.S : +125 ± 2 C 1,000 + 4 / - 0	

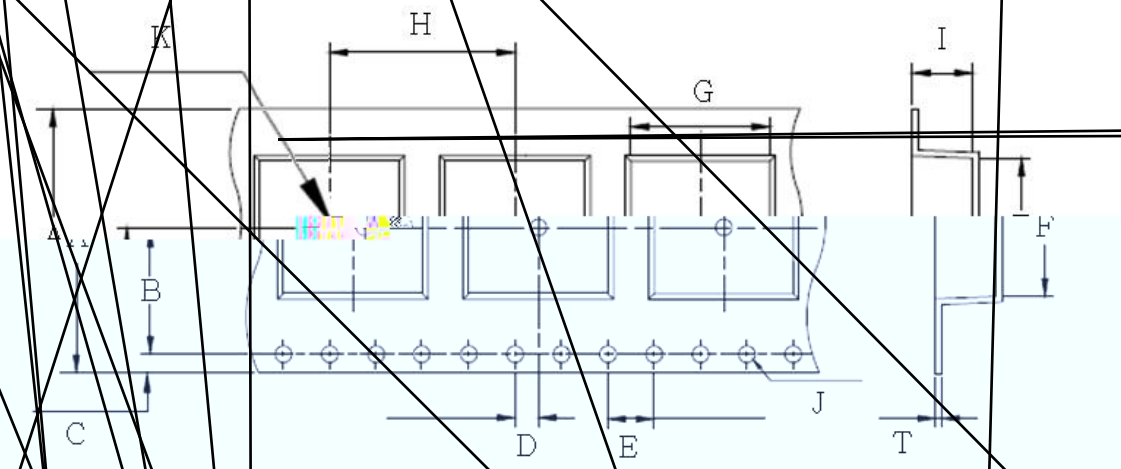


G	F	I	T	H	A
10.7 ± 0.1	12.0 ± 0.1	6.5 ± 0.1	0.35 ± 0.05	16.0 ± 0.1	24.0 ± 0.3
J	K	D	E	B	C
1.50 ± 0.1	1.50 ± 0.1	2.0 ± 0.1	4.0 ± 0.1	11.5 ± 0.1	1.75 ± 0.1

A	B	C
24.5 ± 0.2	2.0 ± 0.2	B

- T 300 / .
- T 0.1 0.7 N.

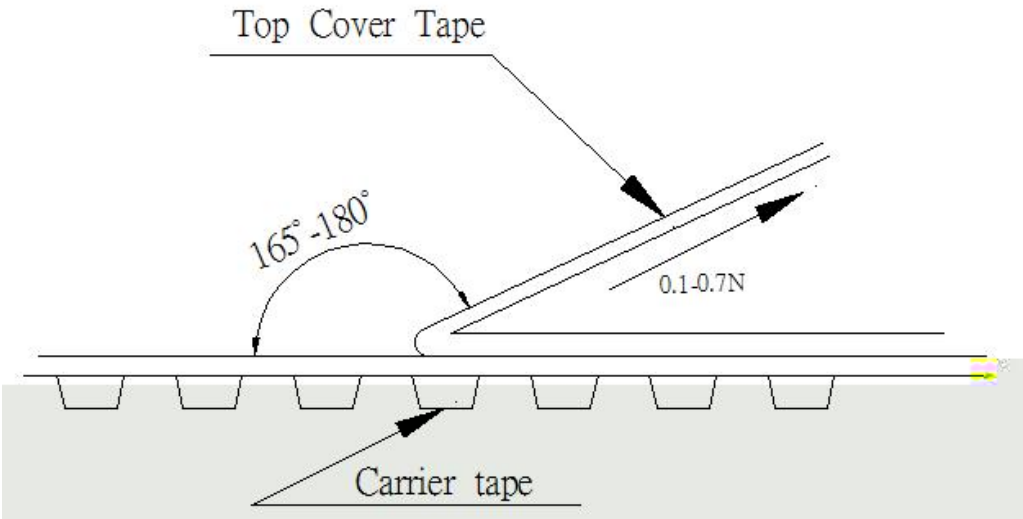

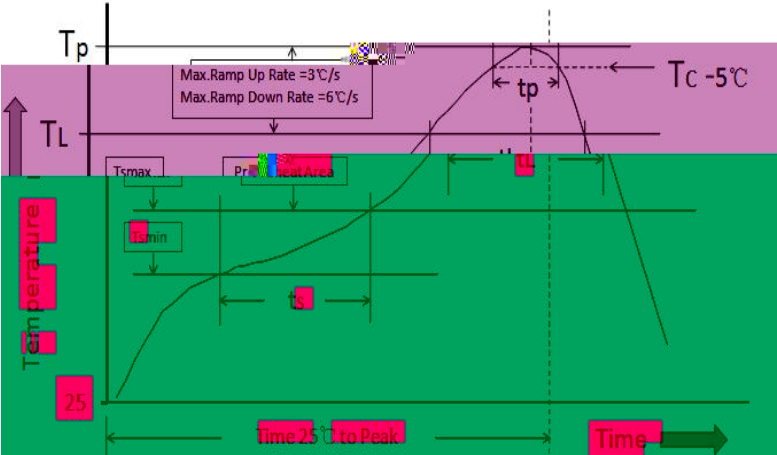

	<	≥
< 2.5	235°C	220°C
≥ 2.5	220°C	220°C

	<		
< 1.6	260°C	260°C	260°C
1.6-2.5	260°C	250°C	245°C
> 2.5	250°C	245°C	245°C

P	S	T (T)	100℃	150℃
		T (T)	150℃	200℃
		T ():T T	60-120 S	60-120 S
A TL T		3℃/S M .	3℃/S M .	
L (TL)		183℃	183℃	
T (L)		60-150 S	60-150 S	
P (T)*		T 1	T 2	
T ()** 5 °C (T)		20 **	30 **	
A - T TL		6℃/S M .	6℃/S M .	
T 25℃ P T		6 M M .	8 M M .	

*T (T)

** T ()

● 500 /

- T
- L

✓ P	N .	✓ C	N
✓ D		✓ C	P N .
✓ Q		✓ M	P N .
✓ P	N .	✓ M	N
✓ T	N .	✓ M	C

➤ : T 25 35 C, H 45 75% RH

➤ :

✓ M	T	: -55 C A	.
✓ M	T	: +125 C T	.

✓ T	-55 C	+125 C	.
✓ H	,		UL.

➤ :

,

.

➤ : I

(, .).

