


Complex permeability vs.Frequency



Initial permeability	μ_i	25°C	120±20%
Saturation magnetic flux density	B_s (mT)	25°C	430
Relative loss factor 100kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤65
Relative temperature coefficient	α_{μ} ($\times 10^{-6}/^{\circ}\text{C}$)	20 ~ 60°C	65%
Curie temperature	$T_c(^{\circ}\text{C})$		>300
Electrical resistivity	$\rho(\Omega\cdot\text{m})$		10^5
Test core	toroid(mm)		φ20×10

Relative loss factor vs.Frequency

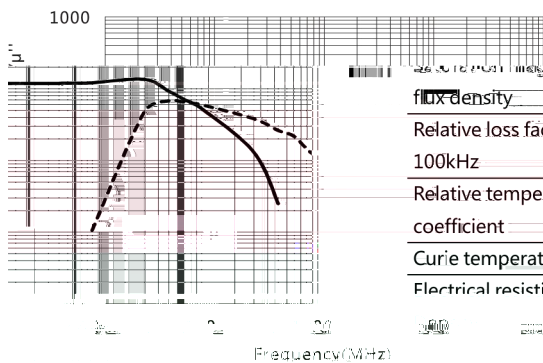